


Revolving transport trolley JKB 2 K

Agile and powerful revolving transport trolley from JUNG. The JKB 2 K transport trolley transports loads up to 2 t with an installation height of 110 mm.

Product number 14 020 085-Vu

Weight 20kg

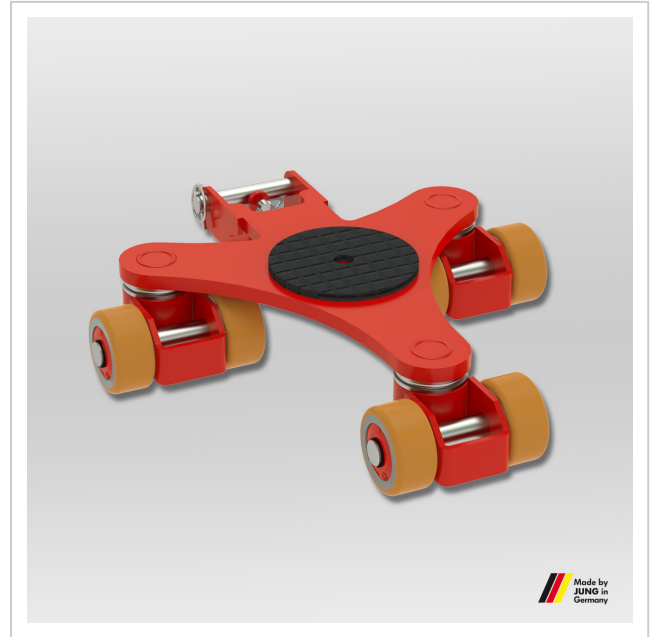

Product description

Advantages of the revolving transport trolley JKB 2 K

- Optional connecting bars can be fixed without tools by clamping down on adapter.
- High load capacity at low weight.
- Bearing supported swiveling castors allow 360° maneuverability.
- The JKB 2 rotation transport trolley, with an installation height of only 110 mm*, is suitable for all steering and transport trolleys of the K series.
- All products are also available in a set of two with price advantage.
- Unrivalled: The double roller system reduces rolling and turning resistance to a minimum.
- In addition, all the rotational trolleys have a platform center hole to allow attachment to the load.
- For choosing the adequate revolving trolley we recommend a load of two-third of the maximum capacity. This will be the most advantageous compromise between payload, ergonomics and handling of the devices.
- Pulling handle and connecting bars available as accessories.

It is recommended to select a payload of approximately 2/3 of the maximum load capacity to achieve the best compromise between payload, ergonomics, and handling of the equipment.

*) Due to technical changes, there may be tolerances of up to + 4.5 mm in the installation height since 2014.

Product properties

Cassette dimensions (mm)	528 x 495
Castor dimensions (Ø x l mm)	85 x 43
Load capacity (suitable)	0 - 5 t
Height (mm)	110
Load capacity (t)	2
Weight JUWATHAN® (kg)	20
Consist of	1 x JKB 2 K
Number of castors (Pieces)	6
Supporting surface per cassette (mm)	150

More images

