


Adjustable trolley JFB 10 K Professional

High-performance transport trolley from JUNG. The JFB 10 K professional trolley transports loads up to 10 t with an installation height of 110 mm.

Product number 08 101 085-D

Weight 35kg

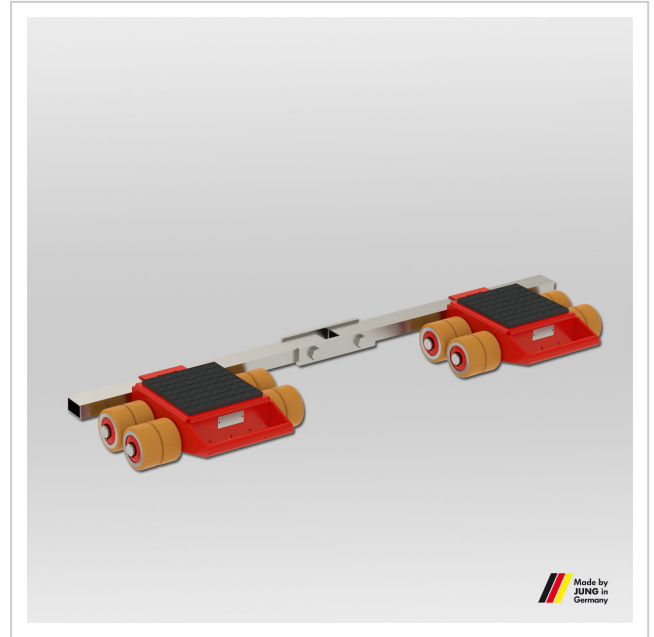

Product description

Qualities of the transport trolley JFB 10 K Professional

- The double roller design results in dramatically easier steering due to reduced friction forces in castors. The much lower friction resistance also causes the trolleys on the rear axis to follow in a truer course.
- You need 30 % less power for steering.
- Higher capacity with professional castors, at same dimension as series K trolleys.
- The adjustable-width transport trolley consists of two transport units and connecting bar.
- Inspected according to technical regulation ANSI ? ASME (USA)

With an installation height of only 110 mm, the tank rollers fit under almost any load. Equipped with a practical handle or additionally with a towing eye, the chassis enables easy maneuvering and positioning. JUNG's transport rollers use ball-bearing rollers for smooth and quiet operation. The rollers come standard with a wear-resistant coating - the JUWATHAN plus coating.

Product properties

| | |
|---------------------------------------------|-------------|
| Number of twin castors (pcs.) | 2 x 6 |
| Castor dimensions (Ø x l mm) | 85 x 85 |
| Weight Professional (kg) | 34 |
| Height (mm) | 110 |
| Supporting surface per cassette (mm) | 170 x 170 |
| Load capacity (suitable) | 16 - 20 t |
| Connecting bar with joint (mm) | 1 230 |
| Cassette dimensions (mm) | 325 x 390 |
| Cassettes adjustable from - to (mm) | 400 - 1 030 |
| Load capacity (t) | 10 |

More images

