

JHS 10 kurz - Hydraulic jack


High-quality hydraulic jack from JUNG. The hydraulic lifting device JHS 10 kurz lifts a load of 10 t and reaches a maximum lifting height of 373 mm at the head plate.

Product number 01 020 105-O

Weight 20kg

Width 200mm

Height 288mm

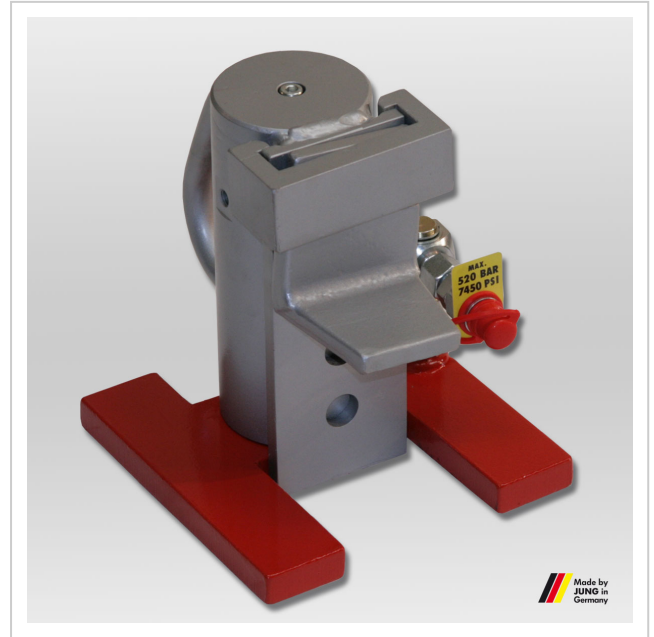

Product description

Advantages of the jack JHS 10 ku (short version)

- 180° revolving housing, this allows the jack to be placed with long or with short feet to the load, if there is no space under that.
- High capacity at low weight.
- Pump unit separated from jack, flexible use, ideal also for confined spaces, also operates in horizontal position.
- Swiveling lifting toe assures optimal adjustment to the load, along with safe and stable support even in raised position.
- Swiveling elbowed nipple allows hose connection from various directions.
- JHS 10 ku as set (JSET 20/3 ku) suits perfectly to the container transport trolleys.

Product properties

Pump unit included	Nein
Lift toe adjustment	5 x 41
Toe depth (mm)	55
Maximum top plate height (mm)	373
Length toe supported (mm)	205
Minimum lift toe height (mm)	20
Top plate height (mm)	265
Maximum lift toe height (mm)	288
Length toe exposed (mm)	260
Diameter top plate (mm)	95
Toe width front (mm)	60
Load capacity on top plate (t)	10
Width (mm)	200
Cylinder volume (l)	0,21

More images

